UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

Geophysical Log Suite from Drill Hole No. 6

Mariano Lake-Lake Valley Drilling Project, McKinley County,

New Mexico

by

U.S. Geological Survey

Open-File Report 81-971 1981

This report is preliminary and has not been reviewed for conformity with U.S. Geological Survey editorial standards and stratigraphic nomenclature.

Table of Contents

raye	-
Introduction1	
Purpose1	
General Drilling Plan2	
Drill Hole No. S-64	
References6	
ILLUSTRATIONS	
Plate 1: 4 - Parameter log - natural gamma, self-potential, resistance,	
neutron-neutron porosity; deviation plot	
Plate 2: 4 - Parameter log - natural gamma, caliper, gamma-gamma	
density, resistivity (not plotted)	
Plate 3: KUT	
Plate 4: Induced polarization, resistivity, spontaneous potential	
Plate 5: Sonic delta, amplitude (far), ratio (near/far)	
Plate 6: Sonic velocity, amplitude (far)	

Geophysical Log Suite from Drill Hole No. 6

Mariano Lake-Lake Valley Drilling Project, McKinley County,

New Mexico

INTRODUCTION

In the fall of 1980, the U.S. Geological Survey contracted with Longman Drilling Company of Albuquerque, New Mexico to rotary drill and core twelve holes along a north-south line from Mariano Lake to the vicinity of Lake Valley, New Mexico. This report incorporates the logs from drill hole no.

6. Similar reports on holes no. 1, 2, 3, 4, and 5 were released by the U.S. Geological Survey (1981a-d).

The drilling project is funded under a reimbursable interagency agreement between the U.S. Bureau of Indian Affairs (BIA) and the U.S. Geological Survey (USGS). The program was designed by representatives of the BIA, USGS, and the Minerals Department of the Navajo Tribe.

PURPOSE

The principal objective of this project was to provide core samples and geophysical logs for petrologic, sedimentologic, geophysical, and geochemical studies of the Upper Jurassic Morrison Formation. Other objectives included the following: stratigraphic and coal studies of Upper Cretaceous rocks; hydrologic and water monitoring of well no. 2; control for a proposed seismic study of the same geographic area; and development of water wells by the Navajo Tribal Water and Sanitation Department.

GENERAL DRILLING PLAN

The locations of all twelve drill holes are shown on figure 1, which is a portion of the Gallup 1° x 2° Quadrangle. The general drilling plan called for most holes to be rotary drilled into the Upper Cretaceous Dakota Sandstone and then cored into or through the Recapture Member of the Morrison Formation. The interval to be cored in each hole was about 600 ft.

Exceptions to the general drilling were as follows: Hole No. 2, rotary drilled, surface to Jurassic Entrada Sandstone; Hole No. 4A, cored 21-218 feet, to test an observed near-surface I. P. anomaly; Hole No. 6, deepened after coring by rotary drilling into the Jurassic Entrada Sandstone; Hole No. 7A, cored only the Westwater Canyon Member of the Morrison Formation; Hole No. 8, abandoned in lower part of Westwater Canyon Member of the Morrison Formation; and Holes Nos. 9 and 10, abandoned in Upper Cretaceous rocks.

Chip samples were collected at 10-ft or 20-ft intervals throughout each hole and sludge samples collected at 20-ft intervals throughout the cored interval.

The following suite of geophysical logs were included in the general drilling project: natural gamma, self potential, neutron-neutron porosity, resistance, resistivity, temperature, deviation, gamma-gamma density, caliper, magnetic susceptibility, gamma ray spectrometer (KUT), sonic, induced polarization conductivity and high resolution 4-arm digital dipmeter.

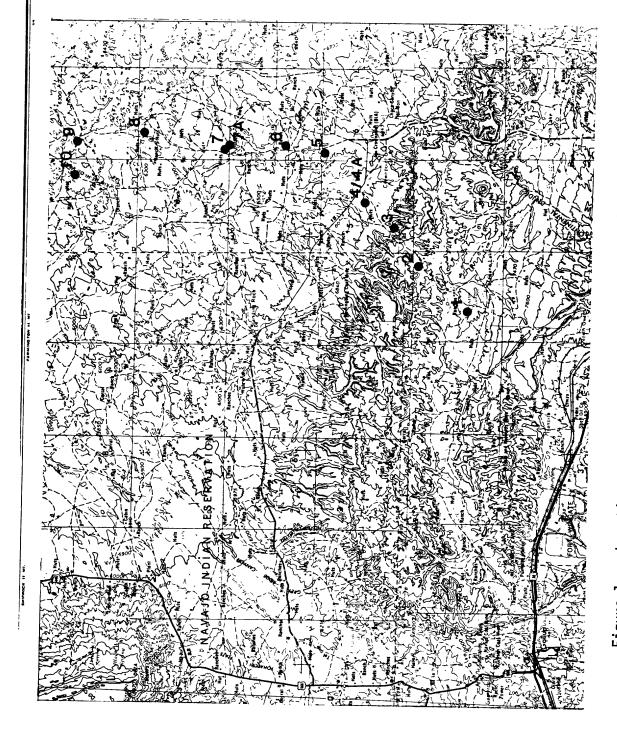


Figure 1. - Location of USGS Drill Holes, Gallup 1⁰ x 2⁰ Quadrangle.

DRILL HOLE NO. S-6

The location of this well is shown on figure 2.

The vital statistics on this well are:

Spud date: Nov. 1, 1980.

Location: T. 18 N., R. 12 W., NE 1/4 sec. 19.

Lat. 35⁰46'18" Long. 108⁰08'54"

Collar Elevation: 6565 feet Cleary Coal Member

Menefee Formation

(Cretaceous)

Core Point Top: 2475 feet (depth) Brushy Basin Member

Morrison Formation

(Jurassic)

Bottom Cored Interval 3075 feet (depth) Recapture Member

Morrison Formation

(Jurassic)

Total Depth: 3470 feet (depth) Entrada Sandstone

(Jurassic)

Completion of well: Abandoned, Dec. 22, 1980.

7" surface casing set to 11 feet.

The following suite of geophysical logs were run on this hole and accompany this report: natural gamma, self potential, resistance, neutron-neutron porosity, deviation, caliper, gamma-gamma density, KUT, induced polarization, resistivity, spontaneous potential and sonic (pls. 1-6).

The self potential, and resistance, logs are of poor quality due to a high-salt-based mud used to maximize hole stability and core recovery. Salt concentration at the time of logging was approximately 80,000 ppm.

Coal and carbonaceous shale intervals were encountered from the surface to 80 feet, at 560 feet, 1200 feet, and 2330 feet.

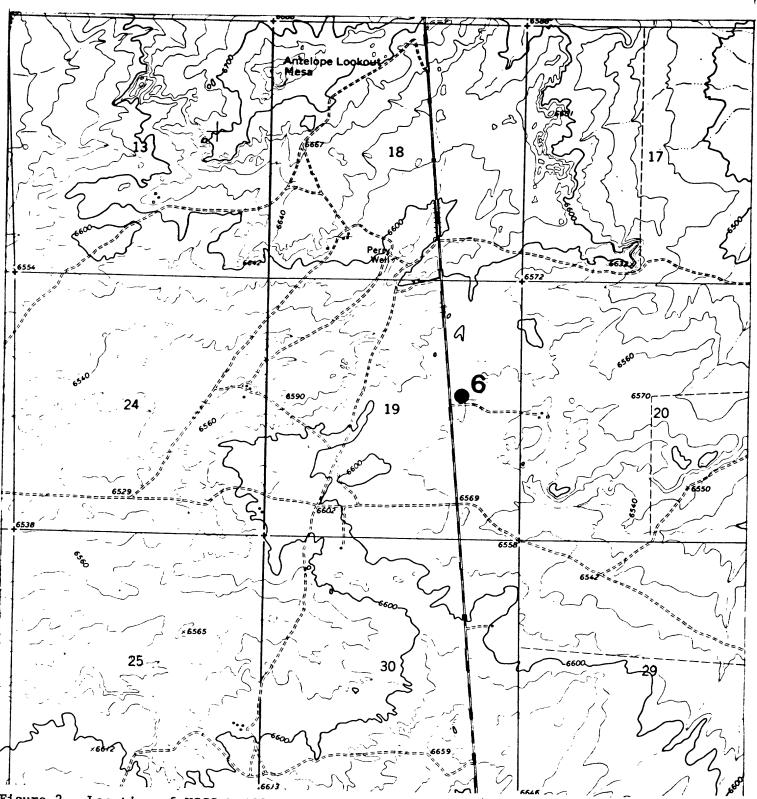


Figure 2.--Location of USGS Drill Hole No. 6, Antelope Lookout Mesa 7 1/2 Quadrangle, T17N, R12W.

References

- U.S. Geological Survey, 1981a, Geophysical Log Suite from Drill Hole Nos. 1 and 2, Mariano Lake Lake Valley Drilling Project, McKinley County, New Mexico: U.S. Geological Survey Open-File Report 81-172.
- U.S. Geological Survey, 1981b, Geophysical Log Suite from Drill Hole No. 3, Mariano Lake - Lake Valley Drilling Project, McKinley County, New Mexico: U.S. Geological Survey Open-File Report 81-439.
- U.S. Geological Survey, 1981c, Geophysical Log Suite from Drill Hole No. 4, Mariano Lake - Lake Valley Drilling Project, McKinley County, New Mexico: U.S. Geological Survey Open-File Report 81-969.
- U.S. Geological Survey 1981d, Geophysical Log Suite from Drill Hole No. 5,

 Mariano Lake Lake Valley Drilling Project, McKinley County, New

 Mexico: U.S. Geological Survey Open-File Report 970.